



Description: Wire splice for 2015-2016 Ford F150 Switchback

For the installation please note that you will have two loose wires for the switchback function.

Brown wire will be (+) Positive and the black wire will be (-) Negative.

Both wires will need to be spliced into the turn signal bulb for the switchback function to work properly.




Pictured above is a corner light bulb harness with integrated turn signal and parking light function.

The two wires located at the bottom of the new AnzoUSA headlight will operate the switchback function.



To check the polarity of the wires, you can use a light testing tool to check. First turn on the turn signal and ground your light testing tool and insert the tip of the tool into the socket. When the light testing tool flashes you have located the (+) positive turn signal wire.

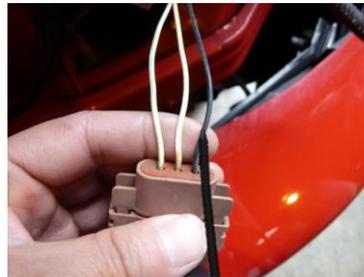

Locate the black (-) negative wire from the AnzoUSA headlight and splice that wire into the (-) negative wire on the turn signal harness, typically this wire will be black.



Locate the brown (+) positive wire from the AnzoUSA headlight and splice that wire into the (+) positive turn signal bulb wire. The positive turn signal bulb wire is typically the outside wire opposite of the negative wire.



If you need more assistance with the installation please see our Youtube channel or contact us at 888-360-3696 Mon-Fri 8AM - 5PM PST.

<https://www.youtube.com/watch?v=xXUFKhVfJQg>

Once you are done with the installation check all functions to make sure they are working properly.

*AnzoUSA™ products are covered, by a limited one (1) year warranty, to be free of manufacturer's defects. However, certain AnzoUSA™ product categories have warranty policies which differ from this standard, please contact your representative for detailed category information. Damage due to improper installation or road hazards is not covered. Seller and manufacturers' only obligations shall be to replace the product proven to be defective. Neither seller nor manufacturer shall be liable for any injury, loss or damage, direct or consequential, arising out of the use of or the inability to use the product. Before using, user shall determine the suitability of the product for its intended use, and user assumes all risk and liability whatsoever in connection therewith.*